

PERFECTA-T 32

ALARM CONTROL PANEL

The **PERFECTA-T** series alarm control panels are designed to secure small and medium-sized buildings, such as apartments, single-family houses, terraced segments, offices, small businesses etc. They provide security in accordance with EN 50131 Grade 2 requirements.

The system based on the **PERFECTA-T 32** control panel is characterized by simple configuration as well as easy and intuitive operation. Keypads are used to configure and operate it. It can also be controlled with keyfobs working in the 433 MHz frequency band (if the **INT-RX-S** module is connected to the control panel).


The built-in PSTN telephone dialer can be used for event reporting (e.g. to the security agency monitoring station) and voice messaging as well as for audio verification (listening in to the sounds from the protected building).

The control panel electronics board comes with 8 wired zones and 4 wired outputs. Their number can be increased by connecting extension modules: **INT-E** zone expanders and **INT-O** or **INT-ORS** output expanders. This allows you to expand the system by adding more detectors, sirens and even actuators (to control the garage door, roller blinds, garden sprinklers).

The control panel enables the system to be divided into two partitions, with three selectable arm modes (day, night, full). Each zone can be assigned to one or both supervised areas.

You can configure the system in two ways: by using the intuitive **PERFECTA Soft** program (from a computer connected with a RS-232 (TTL) cable) and by means of a keypad, using shortcut keys in the service menu.

- compliance with EN 50131 Grade 2
- from 8 to 32 programmable wired zones:
 - NO, NC, EOL, 2EOL/NO, 2EOL/NC configuration to choose from
 - support for roller shutter and vibration detectors
- from 4 to 12 programmable wired outputs
- 2 power outputs on the mainboard
- built-in modules:
 - PSTN telephone dialer (reporting to the station, voice notifications)
 - voice module (play-back of voice messages for telephone messaging)
 - audio alarm verification (listening in to sounds from the building)
- division of the system into 2 partitions:
 - 3 arm modes in each partition
 - option to assign each zone to two partitions
 - user control or timer control option
- communication bus for connecting keypads (**PRF-LCD**), expansion modules (**INT-E**, **INT-O**, **INT-ORS**) and 433 MHz keyfob receiver expander (**INT-RX-S**)
- system control by using:
 - **PRF-LCD** keypads (up to 4)
 - remote control keyfobs operating in the 433 MHz band (up to 15) – the **INT-RX-S** module is required
- ability to update the software (firmware)
- codes:
 - 15 user codes
 - 1 service code
- editing names (of users, partitions, zones, outputs and modules) for easier control and supervision of the system

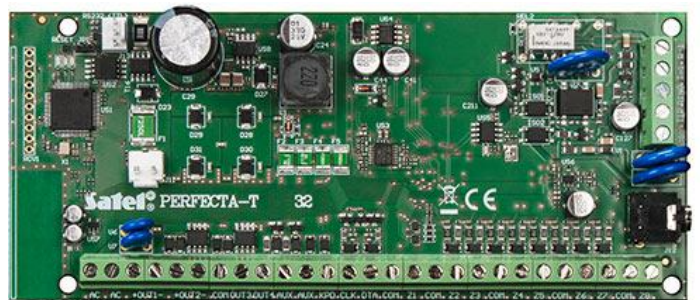

- timers:
 - 8 timers with the exceptions setting option
- 3584 events memory
- automatic diagnostics of the basic system components
- built-in switching power supply:
 - overload protection
 - protection against deep discharge of the battery
 - battery charging current control
- programming the control panel settings:
 - keypad
 - computer with the **PERFECTA Soft** program installed, connected to the control panel RS 232 (TTL) port

TECHNICAL DATA

Voice messages	16
Event log	3584
Partitions	2
Timers	8
Board dimensions	160 x 68 mm
Operating temperature range	-10...+55 °C
Supply voltage (±15%)	18 V AC, 50-60 Hz
Standby mode current consumption	100 mA
Max. current consumption	160 mA
Weight	100 g
Maximum humidity	93±3%
Current consumption from battery - standby	90 mA
Battery failure voltage threshold (±10%)	11 V
Battery cut-off voltage (±10%)	10,5 V
Environmental class according to EN50130-5	II
Maximum current consumption from the battery	130 mA
Programmable wired inputs	8
Maximum number of programmable inputs	32
Programmable wired outputs	4
Maximum number of programmable outputs	16
Supplying outputs	2
Communication buses	1
Keypads	up to 4
Security grade according to EN 50131	Grade 2
Current-carrying capacity, AUX output	500 mA / 12 V DC
Recommended transformer	40 VA
Users	15
Current-carrying capacity of KPD output	500 mA / 12 V DC
Output voltage range	10,5V...14 V DC
Battery charging current	500 mA
Power supply output voltage	12 V DC ±15%
Telephone numbers for notification	8
Power supply output current	2 A
Low current programmable outputs rating	25 mA / 12 V DC
Current-carrying capacity of programmable high-current outputs	1000 mA / 12 V DC